

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 16 TOWNSHIP 16 RANGE 5

DATE: 2-14-06

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison on top of stone

METHOD OF ESTABLISHMENT: County: 6-19-00


IN. S.P.C. E ZONE NAD '83

NAME: 16051605

N: 509104.7725(m)

E: 73035.0688(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

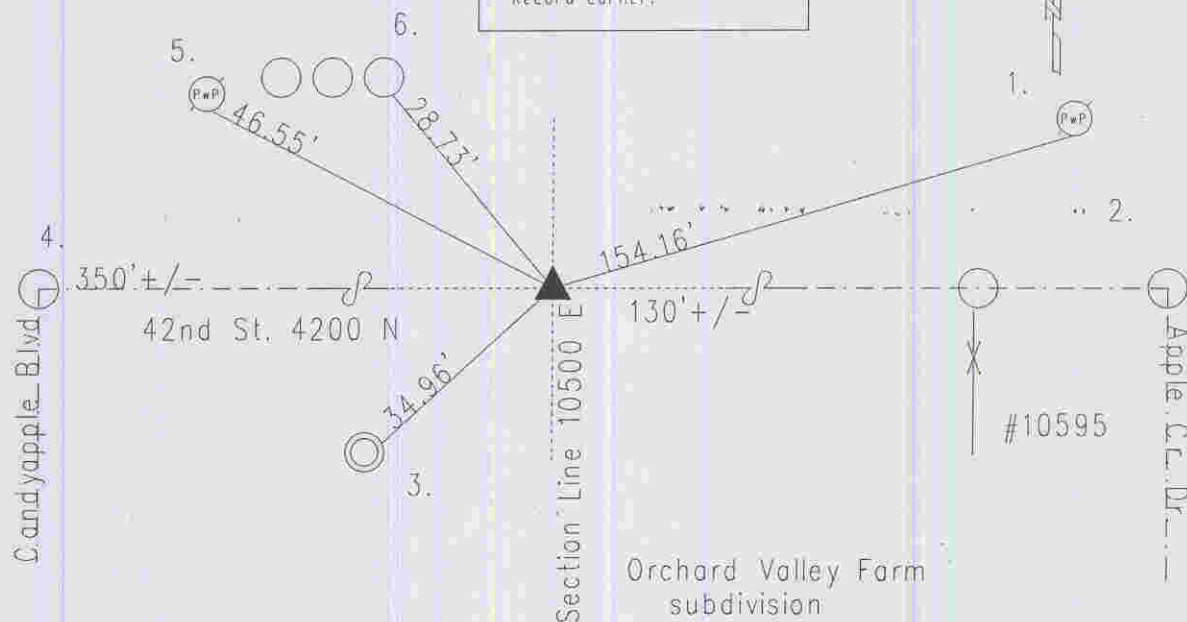

A survey by D.B. Hosbrook on 9-1-8151 indicates no stone but witness: 14" beech S 66 W 12 links, 14" beech S 50 e 38 links per Lawrence Township Legal Survey Book pg. 57. Survey by J. M. Bell 3-8-1892 indicates corner set at intersection of lines w/no stone or witness called out per Lawrence Township Legal Survey Book pg. 48. Monroe 11-8-51 called a stone. Fortner 3-13-75 called a PK nail. Gries 3-1-88 called a PK nail. Wilcoxon 10-3-96 called a railroad spike with cut 'x' found. Excavated by Wilcoxon 6-19-00 and a 1" steel pin with a 4" brass plate was found 8" down. A stone was found 18" down. Harrison set. Re-tied 2-14-06 by Wilcoxon.

16051605

REF.	DISTANCE	DESCRIPTION
1.	154.16'	PK nail S PwP#1-381C 18'up
2.	130'+/-	Due E to 5' chain link fence for Lewis Farm
3.	34.96'	Cut 'x' E rim of sewer manhole
4.	350'+/-	Due W to C/I Candy Apple Blvd.
5.	46.55'	Mag nail w/bw S PwP#16-381C 4"up
6.	28.73'	PK nail NW fence post 12"up